




RockBoard[®] LM 4

Four-channel Line Mixer

Manual
English

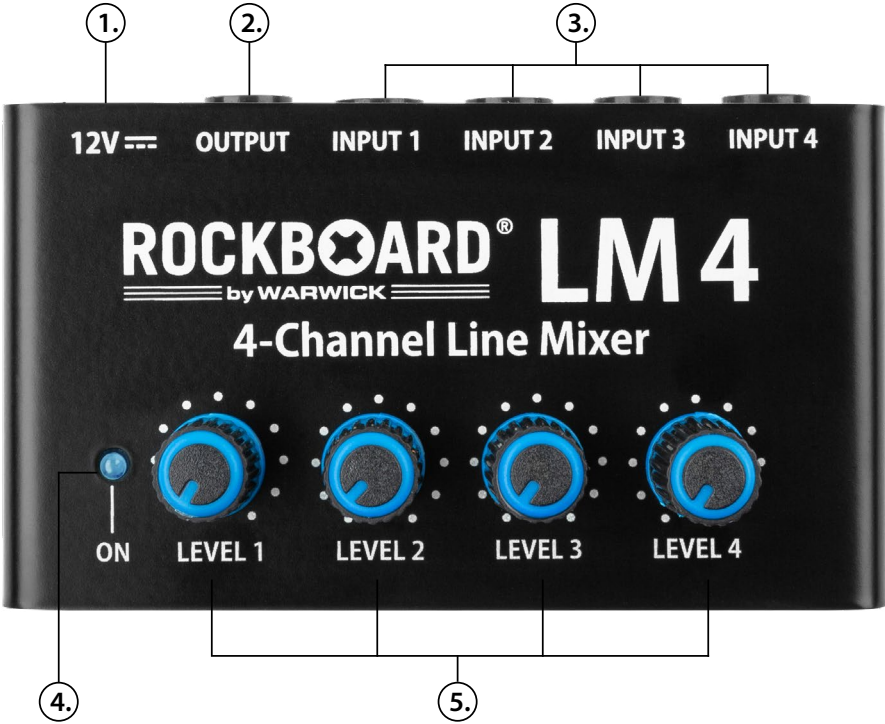

- ① 12V DC jack
- ② 6.3 mm TS line level output
- ③ 6.3 mm TS line level input
- ④ Power LED
- ⑤ Volume controls

Description

The **RockBoard[®] LM 4** is a very compact four-channel line mixer capable of combining four mono line level input signals into one mono line level output. Each of the four input channels has its own amplifier and its own volume control and delivers professional low-noise audio quality. Its robust and compact design makes the LM 4 the ideal choice for studio and live situations. Ideal as a sub-mixer, for example for multiple keyboards, to avoid taking up valuable channels on the mixing console.

Features & Functions

- compact four-channel line mixer for stage and studio applications
- four separate high performance amplifiers
- separate volume control for each input
- top sound quality at all volume levels
- high-quality components and robust construction with metal enclosure
- 12V DC / 20 mA, 2.1 x 5.5 mm barrel plug, center negative, power supply included
- Input : 4 x 6.35 mm (1/4") TS jack
- Output: 1 x 6.35 mm (1/4") TS jack
- SNR: 95 dB
- THD: 0.009 %
- Frequency Response: +1 dB / -2 dB @20 Hz -22 kHz
- Dimensions (L x W x H) incl. knobs and feet:
102 x 58 x 45 mm / 4.02" x 2.28" x 1.77"
- Weight: 182 gr / 0.40 lbs



Note: The manufacturer reserves the right to change these specifications without notice.