

User's Manual

WHITE LOOP

MINIMAL

2 LOOP SYSTEM




Thank you for your purchase of the White Loop by One Control.

The WHITE LOOP is a two loop true bypass looper. What separates the WHITE LOOP from many other similar products is the flash loop function. The WHITE LOOP has a green and red loop. One switch toggles between these two loops. The second switch bypasses both loops.

Additionally the White Loop features 2 DC outs which can be used to power 2 additional pedals, while using the DC INPUT.

- 1 DC OUT 9 Volt output to power an effect pedal
- 2 GREEN LOOP RETURN Output from effect pedal(s)
- 3 GREEN LOOP SEND Input to effect pedal(s)
- 4 RED LOOP RETURN Output from effect pedal(s)
- 5 RED LOOP SEND Input to effect pedal(s)
- 6 9VDC INPUT Typical 9V center negative power supplies can be used. (We recommend the OneControl EPA-2000 power supply.)
- 7 INPUT JACK Plug in your instrument here.
- 8 FOOT SWITCH Toggles White Loop on/off. While off, the pedal has true bypass.
- 9 FOOT SWITCH Toggles Between Loop GREEN and RED. When Loop Green is selected the green LED will light up, when Loop Red is selected the red LED will light up
- 10 OUTPUT JACK This is a typical output that should be connected to your amplifier.

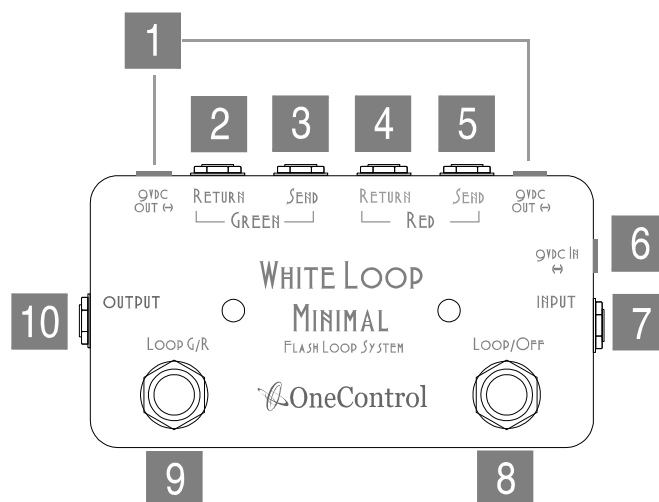

Effects connected to Loop Red and Loop Green, while being powered, can be bypassed with a true bypass switch. Effect 1 and 2 can be turned off with the Red and Green switch with one action.

Both loops can be used to connect a tuner to allow a mute function while tuning. Use the send out of either the Green or Red Loop.

Specifications

Current Draw: 9 Volt center negative, max. 5mA (for LED indicators).

DIMENSIONS: 120Wx65Dx46H mm (Jack and Footswitch Included) 4.4Wx2.6Dx1.8H inch

WEIGHT: 200g

Warranty

Repairs or exchanges under warranty are subject to these warranty guidelines:

This product is covered under our warranty for the period of 1 year from date of purchase, as filled out on the warranty card. In the case the product needs to be shipped, the cost of shipping will be paid by the buyer.

The Following are not covered by this warranty:

Fire, earthquake, natural disasters such as flooding, material breakage, or war. Warranty is void if there is any trace of repair or modification that is not performed or authorized by LEP International.

One Control by LEP International Co, LTD.

9-16 Suehiro Hanamaki

Iwate 025-0079, Japan

Phone: 0198-23-6600 Fax: 0198-29-4244

support@one-control.com

www.one-control.com